

Please download PDF and fill in the boxes. Use 'Additional Information' for non standard requests. Return form to sales@thermal-detection.com or fax to +44 1642 618307

Name: _____ Email: _____
 Organisation: _____ Tel: _____
 Country _____


Section 1 - unit dimensions in mm, select options required Terminal Head Material

Service Temperature Range (min/max °C)
 PT100 500 °C max
 T/C 850 °C max

Probe Diameter _____

Probe Immersion Length in mm (if screw or flanged connection specified, this is the length below screw or flange)

Probe Material _____

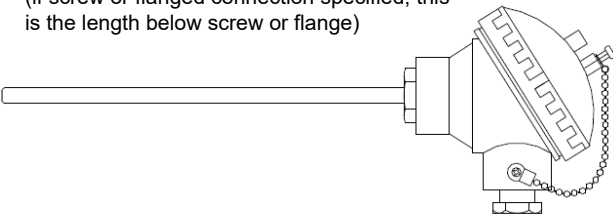

Sensor Number	Thermocouple Only		PT100 Only	
	Hot Junction	Type	Type	Wires
Single	G Grounded	Type 'T'	Class 'A'	2 wire
Duplex	s Insulated		Class 'AA'	3 wire
Triplex			1/10 DIN	4 wire

Section 3 Process Connections


None


Fixed Thread → + Adjustable Compression Fitting


Flange (specify) _____

Termination Options

DIN plate

Ceramic Block 

Transmitter - In Head 

Transmitter - DIN rail 

Transmitter Range Min/Max °C _____ / _____

Section 4 - Application Details Additional information

Number of probes required _____

Industry Type _____