

Please download PDF and fill in the boxes. Use 'Additional Information' for non standard requests.
Return form to sales@thermal-detection.com or fax to +44 1642 618307

Name: _____ Email: _____
 Organisation: _____ Tel: _____
 Country _____


Section 1 - unit dimensions in mm, select options required Head Selection

Service Temperature Range (min/max °C)
 PT100 500 °C max
 T/C 850 °C max


Probe Diameter _____

Probe Length _____

Probe Material _____

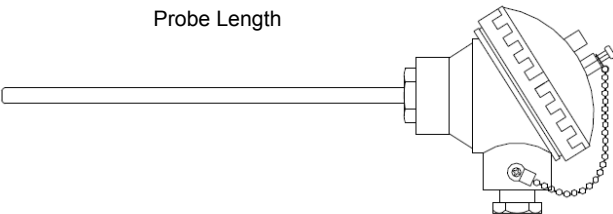

Sensor Number	Thermocouple Only		PT100 Only	
	Hot Junction	Type	Type	Wires
Single	G Grounded	Type 'T'	Class 'B'	2 wire
Duplex	s Insulated	Type 'K'	Class 'A'	3 wire
Triplex		Type 'J'	1/3 DIN	4 wire
		Type 'E'	1/10 DIN	

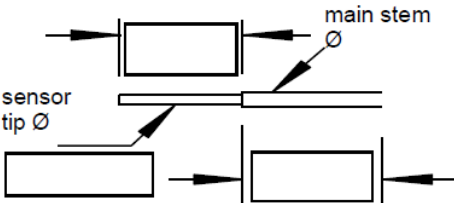Section 3	Reduced Probe Tip	Process Connections	In head Transmitters
	None	Fixed Thread → + Compression	Transmitter Type _____
	Flanged		Transmitter Range Min/Max °C _____ / _____
	Hygienic		

Section 4 - Application Details

Number of probes required _____ Additional information _____

Industry Type _____

Available Heads

Form B



KNE



BUZ (Aluminium or st st)



BUZ-H Duplex



KPP White FDA



YCE



KSE mini



LS 316 stst



MA mini

